

PRO-4700CB

Adapters Track System

3-circuit Ultimate Adapter Casambi



Product code White (RAL 9010) PRO-4700CB-W
EAN code White 8709747934074


Product code Grey (RAL 7040) PRO-4700CB-S
EAN code Grey 8719747934081

Product code Black (RAL 9011) PRO-4700CB-B
EAN code Black 8719747934098

Main materials PC UL94VO + Copper
Net weight per piece 110 g
Inner box / outer box 1 / 50 pcs
Rated voltage per circuit 220V – 240V
Current range 325mA– 700mA

Dimensions

Specifications

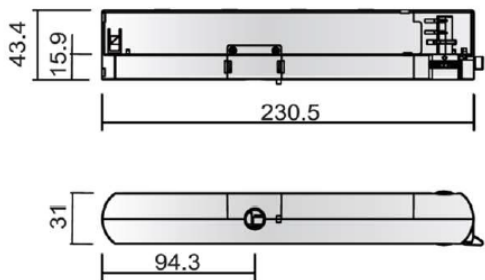

Flicker Free
Input: 220-240Vac, 50/60Hz
Output: 20-44Vdc, 59Vdc Max.
PF>0.9, THD<15%
ta: 0°C - 35°C, tc: 85°C
Fmax: 50N
Unloaded protection, Short-circuit Protection
Overvoltage Protection
Certificate: CE

DIP-Switch

PRO-4700CB	1	2	3	4	Power
325mA	○	○	○	○	14W
350mA	○	○	○	●	15,5W
375mA	○	○	●	○	16,5W
400mA	○	○	●	●	17,5W
425mA	○	●	○	○	18,5W
450mA	○	●	○	●	19,5W
475mA	○	●	●	○	21W
500mA	○	●	●	●	22W

PRO-4700CB	1	2	3	4	Power
525mA	●	○	○	○	23W
550mA	●	○	○	●	24W
575mA	●	○	●	○	25W
600mA	●	○	●	●	26,5W
625mA	●	●	○	○	27,5W
650mA	●	●	○	●	28,5W
675mA	●	●	●	○	29,5W
700mA	●	●	●	●	31W

Excluding nipple!

ON THE RIGHT TRACK